

1) CONSTRUCTION:

CONDUCTOR:	20 AWG STRANDED 10/30 BARE COPPER	NOM. DIA.	.037"
INSULATION:	POLYVINYLCHLORIDE, .013" NOM. WALL THICKNESS		.063"
TRIAD:	(3) INSULATED COLOR CODED NUMBERED SINGLES TWISTED TOGETHER TO FORM A TRIAD		.135"
CABLE:	(2) TRIADS CABLED TOGETHER TO FORM A CABLE CORE.		.271"
SHIELD:	AN ALUMINIZED POLYESTER FOIL SHIELD (FOIL OUT, 100% COVERAGE) SHALL BE APPLIED OVER THE CABLE CORE AND SHALL CONTAIN A 22 AWG 7/30 STRANDED TINNED COPPER DRAIN WIRE IN CONTACT WITH THE METALIZED SURFACE FOR EASY TERMINATION.		.274"
JACKET:	POLYVINYLCHLORIDE, BLACK, .042" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER	.358" (BY PI TAPE)

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	80°C & 105°C
TEMPERATURE RATING, MIN.	-40°C
WT./M', NOM., NET.	54.6 LBS.
JACKET IS SUNLIGHT RESISTANT	

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	23 PF/FT
CAPACITANCE, GROUNDED, NOM.	42 PF/FT
DIELECTRIC WITHSTANDING, MIN.	2000V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX.	10.5 Ω/1,000'

4) AGENCY APPROVALS:


- NEC (UL) TYPE PLTC
- NEC (UL) TYPE ITC
- NEC (UL) TYPE CM
- CEC C(UL) TYPE CM
- UL AWM STYLE 2464

5) APPLICATION:
 PROCESS SYSTEM INTERCONNECT. POWER LIMITED TRAY CABLE, INSTRUMENTATION TRAY CABLE. CLASS 3 CIRCUITS. RoHS COMPLIANT MATERIALS.

6) PRINT: (WHITE INK)
 QUABBIN P/N 0336 (UL) TYPE PLTC OR ITC 20 AWG SHIELDED 105C SUN RES OR C(UL)US CM OR AWM 2464 -- RoHS --
(LOT DESIGNATOR)

7) COLOR CODE:
 EACH TRIAD: BLACK X RED X WHITE
 TRIADS NUMBERED #1 TO #2
 WHITE INK ON BLACK CONDUCTORS
 BLACK INK ON ALL OTHER CONDUCTORS

8) PACKAGING
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

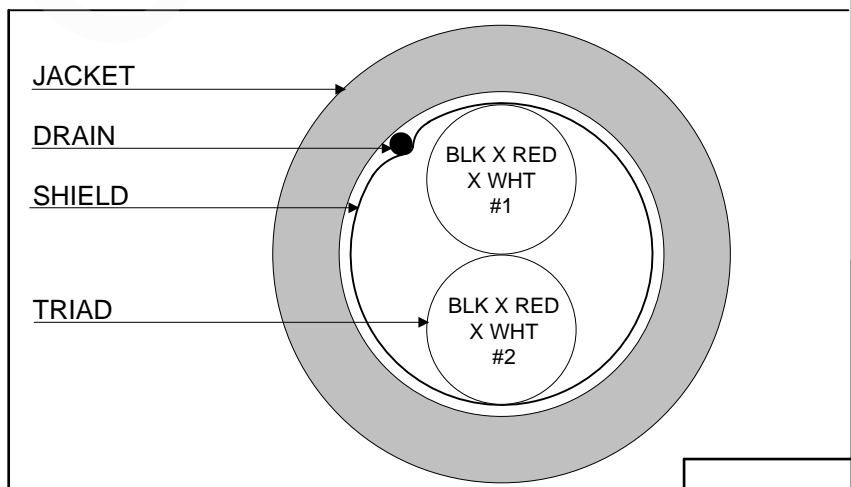

Created 08/20/20	DRAWN: BMD 08/20/20	
REV. 01	CHECKED: ZRS 08/21/20	
TITLE 2 TRIAD (6/C) 20 AWG SHIELDED CABLE -- TYPE PLTC, TYPE ITC, TYPE CM, STYLE 2464		
QUABBIN P/N	0336	1 of 1

CUSTOMER APPROVAL: _____ DATE: _____