

1) CONSTRUCTION:

CONDUCTOR:	20 AWG STRANDED 10/30 BARE COPPER	NOM. DIA.	.037"
INSULATION:	POLYVINYLCHLORIDE, .013" NOM. WALL THICKNESS		.063"
TRIAD:	(3) INSULATED COLOR CODED NUMBERED SINGLES TWISTED TOGETHER TO FORM A TRIAD		.135"
CABLE:	(8) TRIADS CABLED TOGETHER TO FORM A CABLE CORE.		.453"
SHIELD:	AN ALUMINIZED POLYESTER FOIL SHIELD (FOIL OUT, 100% COVERAGE) SHALL BE APPLIED OVER THE CABLE CORE AND SHALL CONTAIN A 22 AWG 7/30 STRANDED TINNED COPPER DRAIN WIRE IN CONTACT WITH THE METALIZED SURFACE FOR EASY TERMINATION.		.456"
JACKET:	POLYVINYLCHLORIDE, BLACK, .052" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER	.560" (BY PI TAPE)

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	80°C & 105°C
TEMPERATURE RATING, MIN.	-40°C
WT./M', NOM., NET.	158.3 LBS.
JACKET IS SUNLIGHT RESISTANT	

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	22 PF/FT
CAPACITANCE, GROUNDED, NOM.	40 PF/FT
DIELECTRIC WITHSTANDING, MIN.	2000V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX.	10.5 Ω/1,000'

4) AGENCY APPROVALS:

- NEC (UL) TYPE PLTC
- NEC (UL) TYPE ITC
- NEC (UL) TYPE CM
- CEC C(UL) TYPE CM
- UL AWM STYLE 2464

5) APPLICATION:


PROCESS SYSTEM INTERCONNECT. POWER LIMITED TRAY CABLE, INSTRUMENTATION TRAY CABLE. CLASS 3 CIRCUITS. RoHS COMPLIANT MATERIALS.

6) PRINT: (WHITE INK)
 QUABBIN P/N 0338 (UL) TYPE PLTC OR ITC 20 AWG SHIELDED 105C SUN RES OR C(UL)US CM OR AWM 2464 -- RoHS --
(LOT DESIGNATOR)

7) COLOR CODE:

EACH TRIAD: BLACK X RED X WHITE
 TRIADS NUMBERED #1 TO #8
 WHITE INK ON BLACK CONDUCTORS
 BLACK INK ON ALL OTHER CONDUCTORS

8) PACKAGING
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

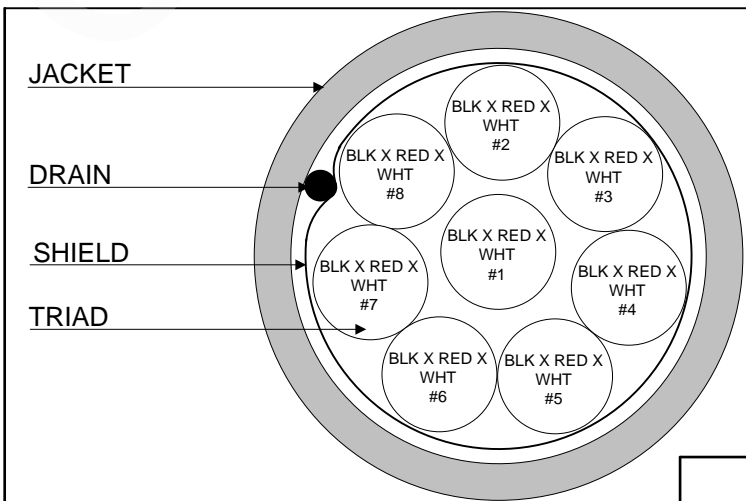

CUSTOMER APPROVAL:

DATE:

Created 08/20/20	DRAWN: BMD 08/20/20	
REV. 01	CHECKED: ZRS 08/21/20	
TITLE 8 TRIAD (24/C) 20 AWG SHIELDED CABLE -- TYPE PLTC, TYPE ITC, TYPE CM, STYLE 2464		
QUABBIN P/N	0338	1 of 1