

1) CONSTRUCTION:

CONDUCTOR:	16 AWG 7/.0192 STRANDED BARE COPPER	NOM. DIA.	.059"
INSULATION:	POLYVINYLCHLORIDE, .016" NOM. WALL THICKNESS		.091"
PAIR:	(2) INSULATED COLOR CODED SINGLES TWISTED TOGETHER TO FORM A PAIR		.182"
COMMUNICATION WIRE:			
CONDUCTOR:	22 AWG 7/30 STRANDED TINNED COPPER		.030"
INSULATION:	POLYVINYLCHLORIDE, ORANGE, .016" NOM. WALL THICKNESS		.062"
CABLE:	(4) PAIRS AND (1) COMMUNICATION WIRE TWISTED TOGETHER TO FORM A CABLE CORE		.355"
SHIELD:	AN OVERALL ALUMINIZED POLYESTER FOIL SHIELD (FOIL OUT, 100% COVERAGE) SHALL BE APPLIED OVER THE CABLE CORE AND INCLUDE A 18 AWG 16/30 STRANDED TINNED COPPER DRAIN WIRE IN CONTACT WITH THE METALIZED SURFACE FOR EASY TERMINATION		.358"
JACKET:	POLYVINYLCHLORIDE, BLACK, .052" NOM. WALL THICKNESS		.462"
	OVERALL CABLE DIAMETER		(BY PI TAPE)

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	80°C & 105°C
TEMPERATURE RATING, MIN.	-40°C
WT./M', NOM., NET.	132 LBS.
JACKET IS SUNLIGHT RESISTANT	

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	26 PF/FT.
CAPACITANCE, GROUNDED, NOM.	48 PF/FT.
DIELECTRIC WITHSTANDING, MIN.	2000V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX.	4.15 Ω/1,000'

4) AGENCY APPROVALS:

- NEC (UL) TYPE PLTC
- NEC (UL) TYPE ITC
- NEC (UL) TYPE CM
- CEC C(UL) TYPE CM
- UL AWM STYLE 2464

5) APPLICATION:


PROCESS SYSTEM INTERCONNECT. POWER LIMITED TRAY CABLE, INSTRUMENTATION TRAY CABLE. CLASS 3 CIRCUITS. RoHS COMPLIANT MATERIALS.

6) PRINT: (WHITE INK)
 QUABBIN P/N 0351 (UL) TYPE PLTC OR ITC 16 AWG SHIELDED 105C SUN RES OR C(UL)US TYPE CM OR AWM 2464 -- RoHS -- (LOT DESIGNATOR)

7) COLOR CODE:

EACH PAIR: BLACK X WHITE
 PAIRS NUMBERED #1 TO #4
 WHITE INK ON BLACK CONDUCTORS
 BLACK INK ON ALL OTHER CONDUCTORS
 A. ORANGE

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

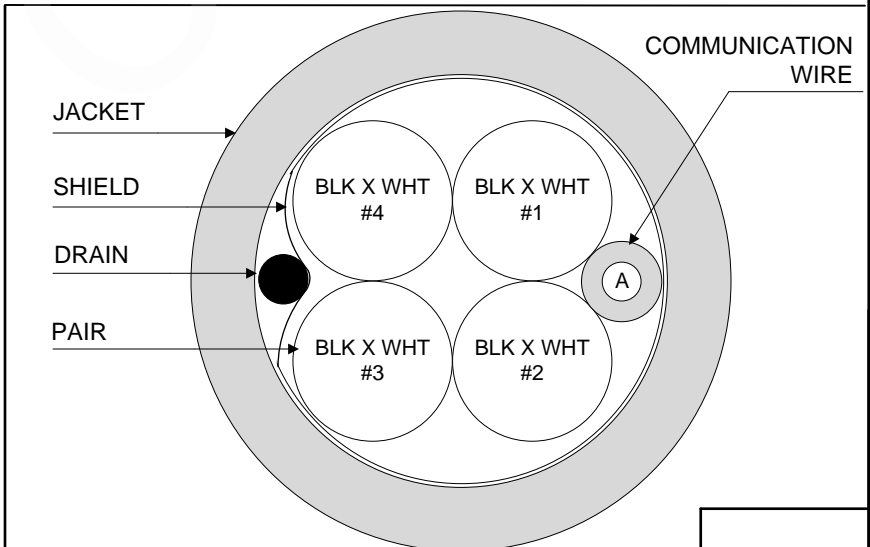

Created 03/25/21	DRAWN: SGH 03/25/21	
REV. 01	CHECKED: ZRS 03/29/21	
TITLE 4 PR (8/C) 16 AWG SHIELDED CABLE -- TYPE PLTC, TYPE ITC, C(UL)US TYPE CM, STYLE 2464		
QUABBIN P/N	0351	1 of 1

CUSTOMER APPROVAL: _____ DATE: _____