

1) CONSTRUCTION:

CONDUCTOR:	16 AWG 19/.0117 STRANDED TINNED COPPER	NOM. DIA.	.057"
INSULATION:	POLYVINYLCHLORIDE, .016" NOM. WALL THICKNESS		.089"
CABLE:	(2) COLOR CODED SINGLES TWISTED TOGETHER WITH FILLERS AND WRAPPED WITH A CLEAR POLYESTER BINDER TO FORM A CABLE CORE.		.181"
SHIELD:	AN OVERALL ALUMINUM POLYESTER FOIL SHIELD (FOIL IN, 100% COVERAGE) SHALL BE APPLIED OVER THE CABLE CORE AND SHALL INCLUDE A 16 AWG 19/.0117 STRANDED TINNED COPPER DRAIN WIRE IN CONTACT WITH THE METALIZED SURFACE.		.184"
RIPCORD:	INCLUDED UNDER JACKET FOR STRIPPING		
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS. OVER ALL CABLE DIAMETER		.248" (BY PI TAPE)

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	105°C
TEMPERATURE RATING, MIN.	-20°C
WT./M', NOM., NET.	44.0 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	47 PF/FT.
CAPACITANCE, GROUNDED, NOM.	87 PF/FT.
DIELECTRIC WITHSTANDING, MIN.	2000V RMS
VOLTAGE RATING, MAX.	600V
D.C. RESISTANCE, MAX. PER ASTM B286	4.82 Ω/1000'

4) AGENCY APPROVALS:

- UL AWM STYLE 2586 105C 600V
- MEETS (UL) VW-1 FLAME TEST
- CSA AWM FT4

5) APPLICATION:

INDUSTRIAL CONTROLS, MEDICAL ELECTRONICS AND OTHER APPLICATIONS WHERE A COMPACT 600V RATED CABLE IS REQUIRED. RoHS COMPLIANT MATERIALS.

6) PRINT:


600V-TROL® E69976 **RU** AWM 2586 VW-1 -- CSA LL51726 AWM I/II A/B 105C 600V FT4 -- RoHS --  
**(LOT DESIGNATOR)**

7) COLOR CODE:

- 1. BLACK
- 2. BROWN

8) PACKAGING

TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

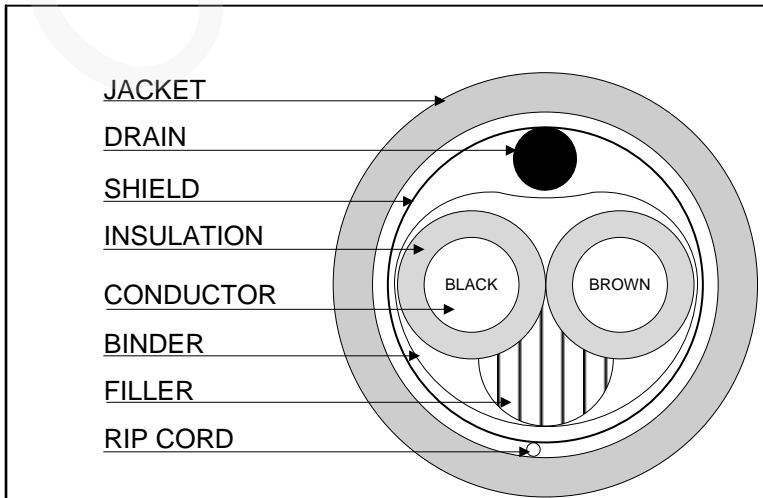

Created 05/27/09	DRAWN: SGH 08/23/19	
REV. 03	CHECKED: JFR 8/23/19	
TITLE 600V-TROL® -- 2/C 16 AWG -- AWM 2586, CSA AWM FT4 CABLE -- SHIELDED		
QUABBIN P/N	0831	1 of 1

CUSTOMER APPROVAL:

DATE: