

1) CONSTRUCTION:

CONDUCTOR:	16 AWG 19/.0117 STRANDED TINNED COPPER	NOM. DIA.	.057"
INSULATION:	POLYVINYLCHLORIDE, .016" NOM. WALL THICKNESS		.089"
CABLE:	(9) COLOR CODED SINGLES TWISTED TOGETHER AND WRAPPED WITH A CLEAR POLYESTER BINDER TO FORM A CABLE CORE.		.327"
SHIELD:	AN OVERALL ALUMINUM POLYESTER FOIL SHIELD (FOIL IN, 100% COVERAGE) SHALL BE APPLIED OVER THE CABLE CORE AND SHALL INCLUDE A 16 AWG 19/.0117 STRANDED TINNED COPPER DRAIN WIRE IN CONTACT WITH THE METALIZED SURFACE.		.330"
RIPCORD:	INCLUDED UNDER JACKET FOR STRIPPING		
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS. OVER ALL CABLE DIAMETER		.394"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	105°C
TEMPERATURE RATING, MIN.	-20°C
WT./M', NOM., NET.	124.3 LBS.
JACKET IS UV RESISTANT	

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	26 PF/FT.
CAPACITANCE, GROUNDED, NOM.	48 PF/FT.
DIELECTRIC WITHSTANDING, MIN.	2000V RMS
VOLTAGE RATING, MAX.	600V
D.C. RESISTANCE, MAX. PER ASTM B286	4.82 Ω/1000'


4) AGENCY APPROVALS:

UL AWM STYLE 2586 105C 600V
 CSA AWM FT4
 MEETS (UL) VW-1 FLAME TEST

5) APPLICATION:

INDUSTRIAL CONTROLS, MEDICAL ELECTRONICS AND OTHER APPLICATIONS WHERE A COMPACT 600V RATED CABLE IS REQUIRED. RoHS COMPLIANT MATERIALS.

6) PRINT:


600V-TROL® E69976  AWM 2586 VW-1 -- CSA LL51726 AWM I/II A/B 105C 600V FT4 -- RoHS --
(LOT DESIGNATOR)

7) COLOR CODE:

- 1. BLACK
- 2. BROWN
- 3. RED
- 4. ORANGE
- 5. YELLOW
- 6. GREEN
- 7. BLUE
- 8. VIOLET
- 9. GRAY


8) PACKAGING

TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

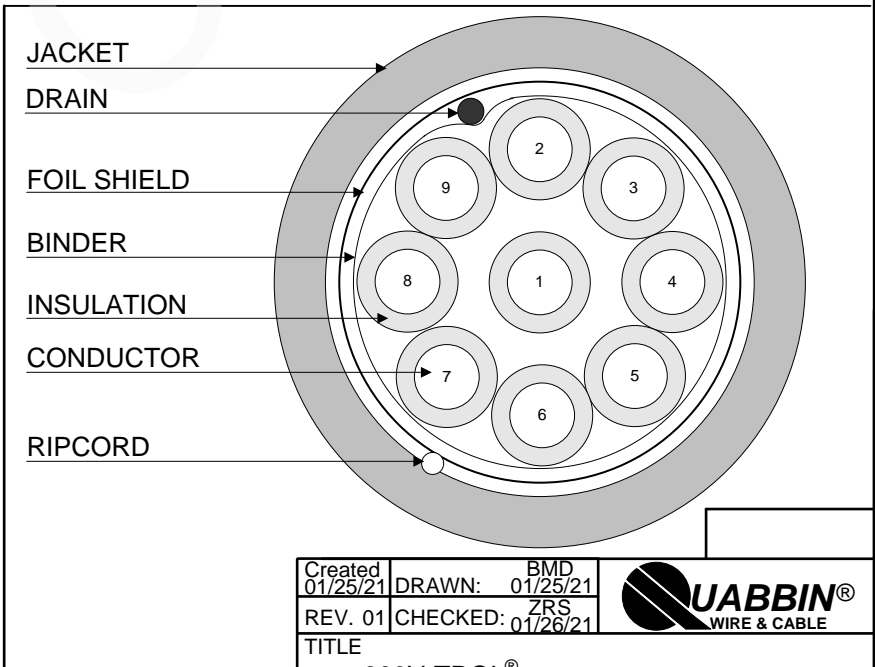

CUSTOMER APPROVAL:

DATE:

Created 01/25/21	DRAWN: BMD 01/25/21	
REV. 01	CHECKED: ZRS 01/26/21	
TITLE 600V-TROL® -- 9/C 16 AWG -- AWM 2586, CSA AWM FT4 CABLE -- SHIELDED		
QUABBIN P/N	0836	1 of 1