

1) CONSTRUCTION:

CONDUCTOR:	26 AWG 7/34 STRANDED TINNED COPPER	NOM. DIA.	.019"
INSULATION:	HIGH DENSITY POLYETHYLENE, .011" NOM. WALL THICKNESS		.0405" ± .001"
PAIRS:	COLOR CODED SINGLES TWISTED INTO PAIRS		.081"
CABLE:	(4) TWISTED PAIRS TWISTED TOGETHER		.177"
SHIELD:	AN ALUMINUM POLYESTER ALUMINUM FOIL SHIELD (100% COVERAGE) WITH 7 ENDS OF 34 AWG TINNED COPPER DRAIN WIRE IN CONTACT WITH THE METALIZED SURFACE SHALL BE APPLIED OVER THE CABLE CORE.		.180"
JACKET:	LOW SMOKE ZERO HALOGEN, (COLOR, PER CHART 1), .023" NOM. WALL THICKNESS		
	OVERALL CABLE DIAMETER		.235" NOM. .240" MAX. (BY PI TAPE)

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	75°C
TEMPERATURE RATING, MIN.	-20°C
WT./M', NOM., NET.	23.4 LBS.

CHART 1:

QUABBIN P/N	JACKET COLOR
2279	BLACK
2280	RED
2281	ORANGE
2282	YELLOW
2283	GREEN
2284	BLUE
2285	VIOLET
2286	GRAY
2287	WHITE

3) ELECTRICAL CHARACTERISTICS:

SEE PAGE 2

4) AGENCY APPROVALS:

NEC (UL) TYPE CM-ST1
CEC C(UL) TYPE CM

5) APPLICATION:

SHIELDED FLEXIBLE PATCH/JUMPER CABLE TO SUPPORT SCREENED 568.2-D CATEGORY 6a APPLICATIONS.
RoHS COMPLIANT MATERIALS. PATENT NO. US 9,355,759 B2.

6) PRINT: (WHITE INK ON BLACK JACKET, ALL OTHERS BLACK INK)

QUABBIN DATAMAX LSZH 6a F/UTP PATCH CORD P/N (QWC P/N PER CHART 1) -- PATENT NO. US 9,355,759 B2 --
CM C(UL)US CM-ST1 26 AWG 75C -- RoHS -- (LOT DESIGNATOR) (SEQUENTIAL FOOTAGE)

7) COLOR CODE:

1. WHITE/ORANGE X ORANGE
2. WHITE/BROWN X BROWN
3. WHITE/GREEN X GREEN
4. WHITE/BLUE X BLUE

8) PACKAGING:


TO BE PACKAGED AS PER QWC'S
STANDARD PACKAGING

JACKET

PAIR

DRAIN

SHIELD

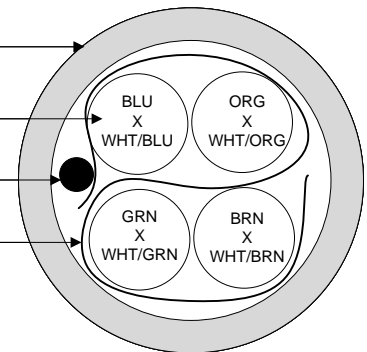

CUSTOMER APPROVAL:

DATE:

Created 06/07/18	DRAWN: 06/20/23 ZRS	BMD 06/20/23
REV. 05	CHECKED: 06/30/23	



TITLE
DATAMAX LSZH DUAL RATED 26 AWG CAT
6a F/UTP PATCH CABLE -- TYPE CM-ST1

DRAWING # QWC0108


1 of 2

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	13.5 PF/FT. AT 1 MHz
DIELECTRIC WITHSTANDING, MIN.	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX.	14 Ω/100m (42.6 Ω/1,000')

NOTE: TESTING FOR THE FOLLOWING IS CONDUCTED OFF THE REEL. (FOR 100m OF CABLE)

IMPEDANCE, NOM.	100 ± 15 Ω 1 - 100 MHz	
	100 ± 20 Ω 100 - 500 MHz	
RETURN LOSS	1 ≤ f < 10 MHz	20 + 5 LOG(f) dB MIN
	10 ≤ f < 20 MHz	25 dB MIN
	20 ≤ f ≤ 500 MHz	25 - 8.6 LOG(f/20) dB MIN
PS NEXT	1 ≤ f ≤ 500 MHz	42.3 - 15 LOG(f/100) dB MIN
NEXT	1 ≤ f ≤ 500 MHz	44.3 - 15 LOG(f/100) dB MIN
PS ACRF	1 ≤ f ≤ 500 MHz	24.8 - 20 LOG(f/100) dB MIN
ACRF	1 ≤ f ≤ 500 MHz	27.8 - 20 LOG(f/100) dB MIN
INSERTION LOSS	1 ≤ f ≤ 500 MHz	1.5[1.82√(f) + 0.0091(f) + 0.25/√(f)] dB MAX
DELAY	1 ≤ f ≤ 500 MHz	534 + 36/√(f) ns MAX
DELAY SKEW	1 ≤ f ≤ 500 MHz	<45 ns
PS ANEXT LOSS (6 AROUND 1)	1 ≤ f ≤ 500 MHz	62.5 - 15 LOG(f/100) dB 50 - 500 MHz 67 dB 1 - 50 MHz
PS AFEXT (6 AROUND 1)	1 ≤ f ≤ 500 MHz	38.2 - 20 LOG(f/100) dB, 67 dB MIN
TCL	1 ≤ f ≤ 500 MHz	30 - 10 LOG(f/100) dB MIN, 40 dB MIN
ELTCTL	1 ≤ f ≤ 30 MHz	35 - 20 LOG(f) dB MIN
VELOCITY OF PROPAGATION	68%	

Created 06/07/18	DRAWN: BMD 06/20/23	
REV. 05	CHECKED: ZRS 06/30/23	
TITLE DATAMAX LSZH DUAL RATED 26 AWG CAT 6a F/UTP PATCH CABLE -- TYPE CM-ST1		
DRAWING #		QWC0108
		2 of 2

CUSTOMER APPROVAL:

DATE: