

1) CONSTRUCTION:  
 CONDUCTOR: 20 AWG 7/28 STRANDED TINNED COPPER  
 INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .013" NOM. WALL THICKNESS  
 CABLE: (7) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE  
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS  
 NOM. DIA.  
 .038"  
 .064"  
 .192"  
 OVERALL CABLE DIAMETER .256"

2) PHYSICAL PROPERTIES:  
 TEMPERATURE RATING, MAX. 60°C & 80°C  
 TEMPERATURE RATING, MIN. -20°C  
 WT./M', NOM., NET. 47.4 LBS.

3) ELECTRICAL CHARACTERISTICS:  
 CAPACITANCE, MUTUAL, NOM. 26 PF/FT.  
 DIELECTRIC WITHSTANDING, MIN 1500V RMS  
 VOLTAGE RATING, MAX. 300V  
 D.C. RESISTANCE MAX., PER ASTM B286 10.4 Ω/1000'


4) AGENCY APPROVALS:  
 NEC (UL) TYPE CM  
 CSA AWM FT4  
 UL STYLE 2464

5) APPLICATION:  
 INSTRUMENTATION, AUDIO, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:  
 QUABBIN 6110 (UL) TYPE CM 20 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --  
**(LOT DESIGNATOR)**

7) COLOR CODE:  
 1. BLACK  
 2. WHITE  
 3. RED  
 4. GREEN  
 5. BROWN  
 6. BLUE  
 7. ORANGE

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S  
 STANDARD PACKAGING

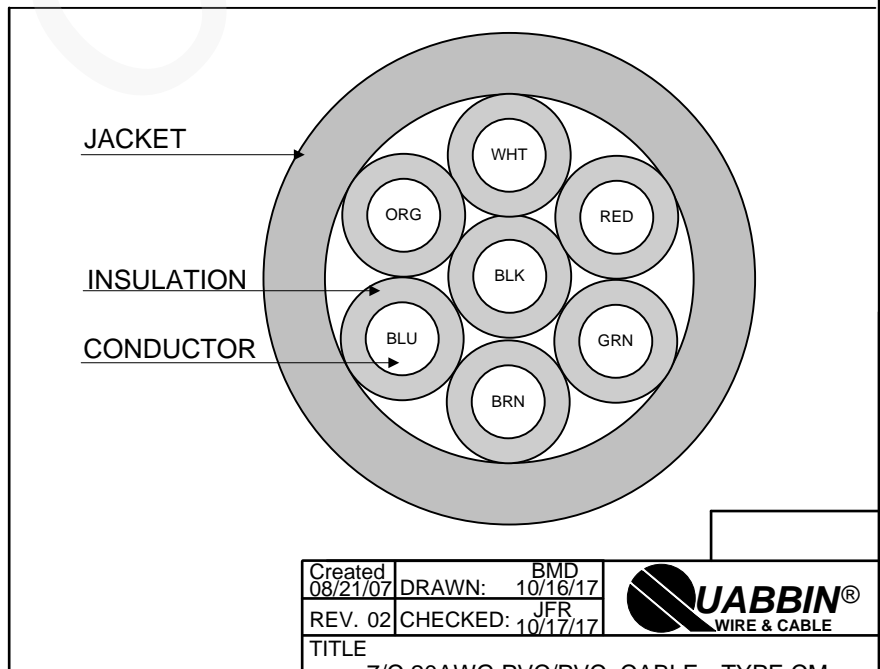

Created 08/21/07	DRAWN: BMD 10/16/17	
REV. 02	CHECKED: JFR 10/17/17	
TITLE 7/C 20AWG PVC/PVC CABLE --TYPE CM, STYLE 2464, CSA AWM FT4		
QUABBIN P/N	6110	1 of 1

CUSTOMER APPROVAL:

DATE: