

1) CONSTRUCTION:

CONDUCTOR:	20 AWG 7/28 STRANDED TINNED COPPER	NOM. DIA.	.038"
INSULATION:	SEMI-RIGID POLYVINYLCHLORIDE, .013" NOM. WALL THICKNESS		.064"
CABLE:	(15) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE		.300"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .035" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER	.370" (BY PI TAPE)

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 80°C
TEMPERATURE RATING, MIN.	-20°C
WT./M', NOM., NET.	92.6 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL NOM.	26 PF/FT.
DIELECTRIC WITHSTANDING, MIN.	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX.	10.4 Ω/1,000'

4) AGENCY APPROVALS:
 NEC (UL) TYPE CM
 UL STYLE 2464
 CSA AWM FT4


5) APPLICATION:
 INSTRUMENTATION, AUDIO, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 6125 (UL) TYPE CM 20 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

7) COLOR CODE:

1. BLACK
2. WHITE
3. RED
4. GREEN
5. ORANGE
6. BLUE
7. WHITE/BLACK
8. RED/BLACK
9. GREEN/BLACK
10. ORANGE/BLACK
11. BLUE/BLACK
12. BLACK/WHITE
13. RED/WHITE
14. GREEN/WHITE
15. BLUE/WHITE

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

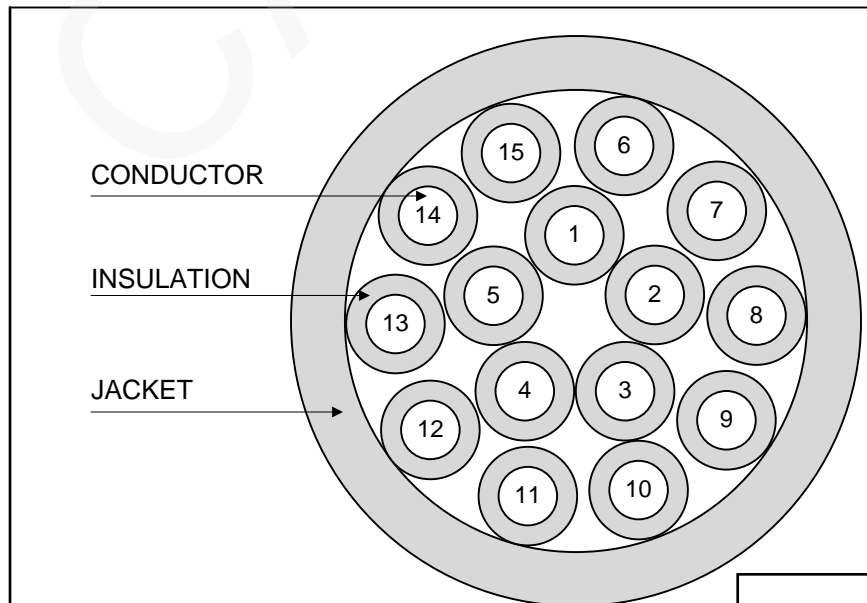

CUSTOMER APPROVAL:

DATE:

Created 09/03/99	DRAWN: SGH 02/26/20	
REV. 05	CHECKED: ZRS 02/26/20	
TITLE 15/C 20 AWG PVC/PVC CABLE – TYPE CM, STYLE 2464, CSA AWM FT4		
QUABBIN P/N	6125	1 of 1