


- 1) CONSTRUCTION:
- | | | | |
|-------------|-----------------------------------------------------------|------------------------|-------|
| CONDUCTOR: | 20 AWG 7/28 STRANDED TINNED COPPER | NOM. DIA. | .038" |
| INSULATION: | SEMI-RIGID POLYVINYLCHLORIDE, .013" NOM. WALL THICKNESS | | .064" |
| PAIR: | COLOR CODED SINGLES TWISTED INTO A PAIR | | .128" |
| JACKET: | POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS | OVERALL CABLE DIAMETER | .192" |
- 2) PHYSICAL PROPERTIES:
- | | |
|--------------------------|-------------|
| TEMPERATURE RATING, MAX. | 60°C & 80°C |
| TEMPERATURE RATING, MIN. | -20°C |
| WT./M', NOM., NET. | 19.2 LBS. |
- 3) ELECTRICAL CHARACTERISTICS:
- | | |
|-------------------------------------|--------------|
| CAPACITANCE, MUTUAL, NOM. | 26 PF/FT. |
| DIELECTRIC WITHSTANDING, MIN. | 1500V RMS |
| VOLTAGE RATING, MAX. | 300V |
| D.C. RESISTANCE, MAX. PER ASTM B286 | 10.4 Ω/1000' |
- 4) AGENCY APPROVALS:
 (UL) NEC TYPE CM
 CSA AWM FT4
 UL STYLE 2464
- 5) APPLICATION:
 INSTRUMENTATION, AUDIO, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.
- 6) PRINT:
 QUABBIN 6130 (UL) TYPE CM 20 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)
- 7) COLOR CODE:
 1. BLACK
 2. RED
- 8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

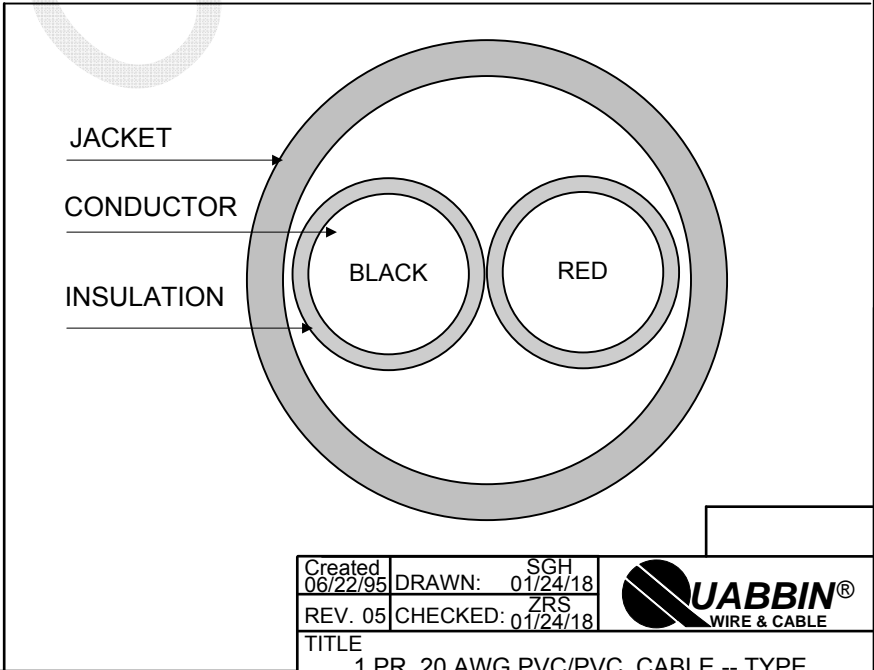

CUSTOMER APPROVAL:

DATE:

Created 06/22/95	DRAWN: 01/24/18 SGH	
REV. 05	CHECKED: 01/24/18 ZRS	
TITLE 1 PR. 20 AWG PVC/PVC CABLE -- TYPE CM, STYLE 2464, CSA AWM FT4		
QUABBIN P/N	6130	1 of 1