

1) CONSTRUCTION:

CONDUCTOR:	20 AWG 7/28 STRANDED TINNED COPPER	NOM. DIA.	.038"
INSULATION:	SEMI-RIGID POLYVINYLCHLORIDE, .013" NOM. WALL THICKNESS		.064"
PAIRS:	COLOR CODED SINGLES TWISTED INTO PAIRS		.128"
CABLE:	(3) PAIRS TWISTED TOGETHER TO FORM A CABLE CORE.		.200"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS		
	OVERALL CABLE DIAMETER		.264" (BY PI TAPE)

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 80°C
TEMPERATURE RATING, MIN.	-20°C
WT./M', NOM., NET.	42.3 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	26 PF/FT.
DIELECTRIC WITHSTANDING, MIN.	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	10.4 Ω/1,000'

4) AGENCY APPROVALS:

- NEC (UL) TYPE CM
- UL AWM STYLE 2464
- CSA AWM FT4


5) APPLICATION:  
INSTRUMENTATION, AUDIO, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:  
QUABBIN 6135 (UL) TYPE CM 20 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --  
**(LOT DESIGNATOR)**

7) COLOR CODE:

1. BLACK X RED
2. BLACK X WHITE
3. BLACK X GREEN

8) PACKAGING:  
TO BE PACKAGED AS PER QWC'S  
STANDARD PACKAGING.

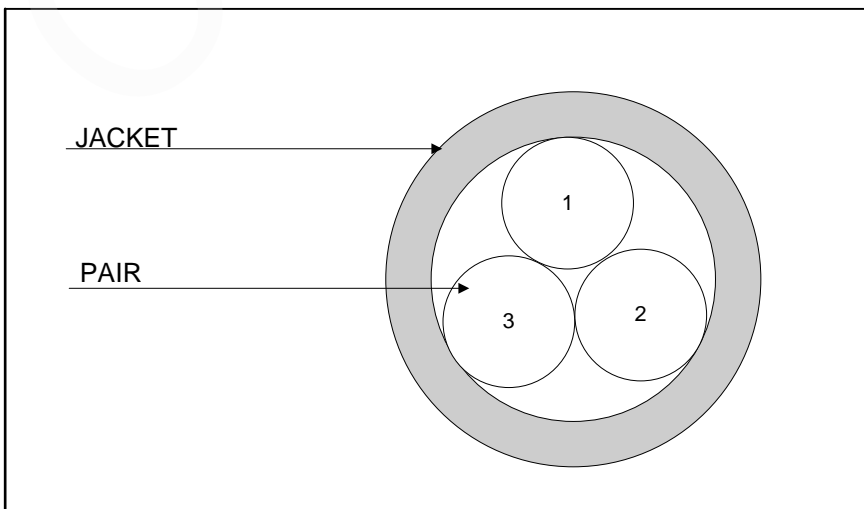

CUSTOMER APPROVAL:

DATE:

Created 04/24/97	DRAWN: BMD 05/18/21
REV. 03	CHECKED: ZRS 05/19/21



TITLE  
6/C (3 PR.) 20 AWG PVC/PVC CABLE --  
TYPE CM, STYLE 2464, CSA AWM FT4

QUABBIN P/N	6135	1 of 1
-------------	------	--------