

1) CONSTRUCTION: NOM. DIA.
 CONDUCTOR: 20 AWG 7/28 STRANDED TINNED COPPER .038"
 INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .013" NOM. WALL THICKNESS .064"
 PAIRS: COLOR CODED SINGLES TWISTED INTO PAIRS .128"
 CABLE: (6) TWISTED PAIRS TWISTED TOGETHER TO FORM A CABLE CORE .314"
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .035" NOM. WALL THICKNESS
 OVERALL CABLE DIAMETER .384"

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C & 80°C
 TEMPERATURE RATING, MIN. -20°C
 WT./M', NOM., NET. 79.3 LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL, NOM. 26 PF/FT.
 DIELECTRIC WITHSTANDING, MIN 2000V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. 10.4 Ω/1000'


4) AGENCY APPROVALS:
 UL AWM STYLE 2464
 (UL) NEC TYPE CM
 CSA AWM FT4

5) APPLICATION:
 INSTRUMENTATION, AUDIO, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 6136R (UL) TYPE CM 20 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 --
(LOT DESIGNATOR)

7) COLOR CODE:
 1. BLACK X RED
 2. BLACK X WHITE
 3. BLACK X GREEN
 4. BLACK X BLUE
 5. BLACK X YELLOW
 6. BLACK X BROWN

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

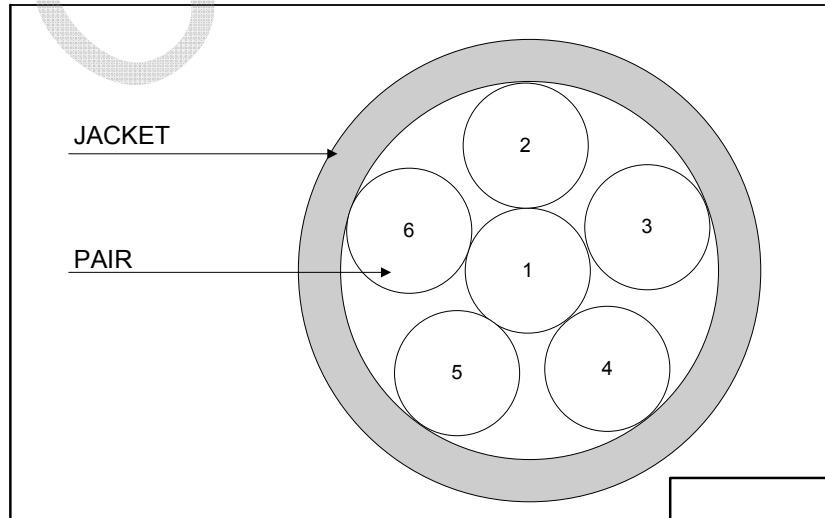

Created 02/10/99	DRAWN: BMD 7/19/12	
REV. 04	CHECKED: GBM 07/19/12	
TITLE		
6 PR. 20 AWG PVC/PVC CABLE --TYPE CM, STYLE 2464, CSA AWM FT4		
QUABBIN P/N	6136	1 of 1

CUSTOMER APPROVAL: _____ DATE: _____