

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR:	22 AWG 7/30 STRANDED TINNED COPPER	.030"
INSULATION:	SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS	.050"
CABLE:	(2) COLOR CODED SINGLES TWISTED TO FORM A CABLE CORE.	.100"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .017" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER .134"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	90°C
TEMPERATURE RATING, MIN.	-20°C
WT./M', NOM., NET.	9.98 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL	19 PF/FT.
DIELECTRIC WITHSTANDING, MIN.	900V RMS
MANUFACTURER'S VOLTAGE RATING, MAX.	250V
D.C. RESISTANCE, MAX. PER ASTM B286	16.7 Ω/1,000'


4) AGENCY APPROVALS:
UL NEC TYPE CL2

5) APPLICATION:
SECURITY AND ALARM INTERCONNECT. POWER LIMITED CIRCUIT CABLE - CLASS 2 CIRCUITS.
RoHS COMPLIANT MATERIALS.

6) PRINT:
QUABBIN 6500 (UL) TYPE CL2 22 AWG 90C -- RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:
1. BLACK
2. RED

8) PACKAGING:
TO BE PACKAGED AS PER QWC'S
STANDARD PACKAGING

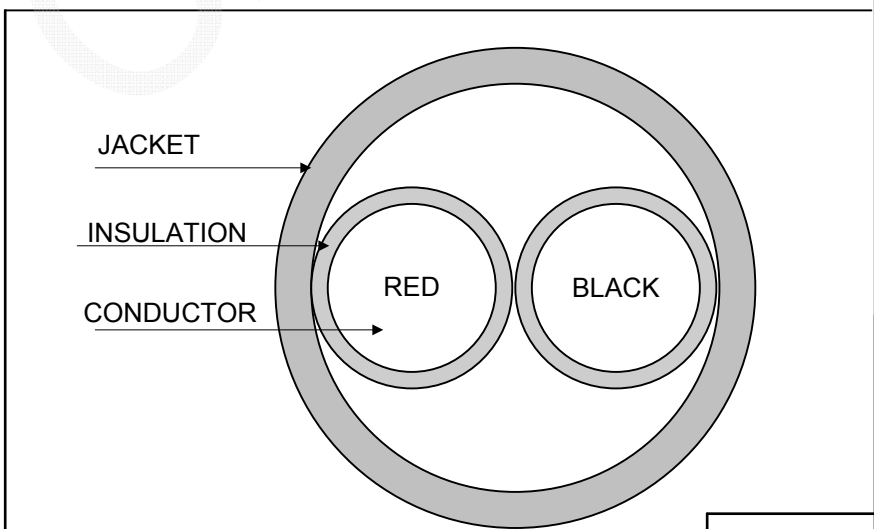

Created 04/26/95	DRAWN: SGH 08/22/18	
REV. 05	CHECKED: ZRS 08/22/18	
TITLE		
2/C 22 AWG PVC/PVC CABLE -- TYPE CL2		
QUABBIN P/N	6500	1 of 1

CUSTOMER APPROVAL: _____ DATE: _____