

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER		.030"
INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS		.050" ± .001"
CABLE: (3) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE		.108"
JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS		.172" ± .010"
	OVERALL CABLE DIAMETER	(BY MICROMETER)

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 80°C
TEMPERATURE RATING, MIN.	-20°C
WT./M', NOM., NET.	17.3 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	26.0 PF/FT.
DIELECTRIC WITHSTANDING, MIN.	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	16.7 Ω/1,000'

4) AGENCY APPROVALS:

- NEC (UL) TYPE CM
- UL AWM STYLE 2464
- CSA AWM FT4


5) APPLICATION:
RS232 COMPUTER INTERCONNECT, CONTROL AND SOUND CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
QUABBIN 7121 (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

7) COLOR CODE:

- 1. BLACK
- 2. RED
- 3. GREEN

8) PACKAGING:
TO BE PACKAGED AS PER QWC'S
STANDARD PACKAGING

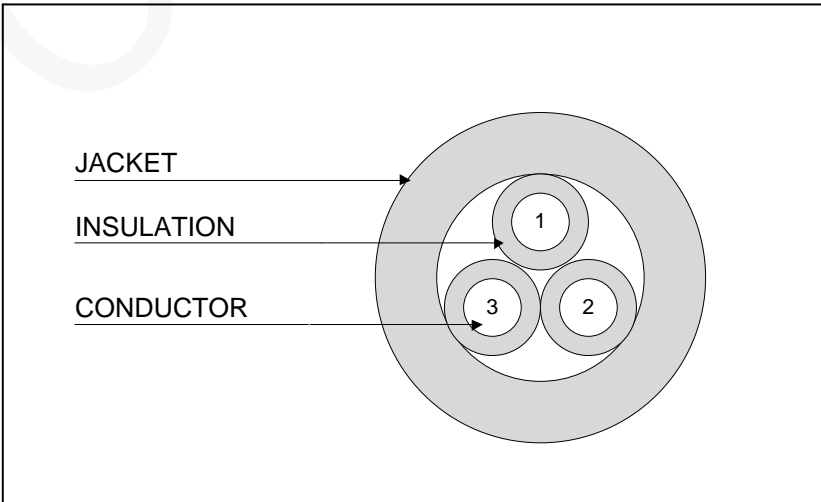

Created 08/12/97	DRAWN: SGH 05/26/22	
REV. 04	CHECKED: ZRS 05/31/22	
TITLE 3/C 22 AWG PVC/PVC CABLE --TYPE CM, STYLE 2464, CSA AWM FT4		
QUABBIN P/N	7121	1 of 1

CUSTOMER APPROVAL: _____ DATE: _____