


- 1) CONSTRUCTION:
- | | | | |
|-------------|--|------------------------|-------|
| CONDUCTOR: | 22 AWG 7/30 STRANDED TINNED COPPER | NOM. DIA. | .030" |
| INSULATION: | SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS | | .050" |
| CABLE: | (6) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE | | .150" |
| JACKET: | POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS | OVERALL CABLE DIAMETER | .214" |
- 2) PHYSICAL PROPERTIES:
- | | |
|--------------------------|-------------|
| TEMPERATURE RATING, MAX. | 60°C & 80°C |
| TEMPERATURE RATING, MIN. | -20°C |
| WT./M', NOM., NET. | 29.7 LBS. |
- 3) ELECTRICAL CHARACTERISTICS:
- | | |
|-------------------------------------|---------------|
| CAPACITANCE, MUTUAL, NOM. | 24 PF/FT. |
| DIELECTRIC WITHSTANDING, MIN. | 1500V RMS |
| VOLTAGE RATING, MAX. | 300V |
| D.C. RESISTANCE, MAX. PER ASTM B286 | 16.7 Ω/1,000' |
- 4) AGENCY APPROVALS:
- (UL) NEC TYPE CM
 - CSA AWM FT4
 - UL AWM STYLE 2464
 - MEETS VW-1 FLAME TEST
- 5) APPLICATION:
- RS232 COMPUTER INTERCONNECT, CONTROL AND SOUND CABLE. RoHS COMPLIANT MATERIALS.
- 6) PRINT:
- QUABBIN 7136 (UL) TYPE CM 22 AWG OR AWM 2464 VW-1 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS -- **(LOT DESIGNATOR)**
- 7) COLOR CODE:
1. BLACK
 2. WHITE
 3. RED
 4. GREEN
 5. BROWN
 6. BLUE
- 8) PACKAGING:
- TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

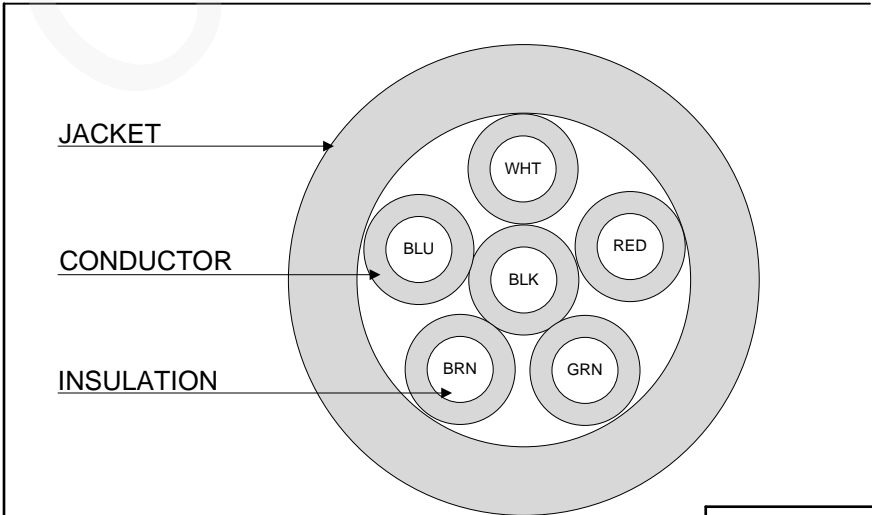

CUSTOMER APPROVAL:

DATE:

| | | |
|---|--------------------------|--------|
| Created 01/29/97 | DRAWN: SGH 04/17/19 | |
| REV. 06 | CHECKED: ZRS 04/18/19 | |
| TITLE | | |
| 6/C 22 AWG PVC/PVC CABLE --TYPE CM, STYLE 2464, VW-1, CSA AWM FT4 | | |
| QUABBIN P/N | 7136 | 1 of 1 |