

1) CONSTRUCTION:  
 CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER  
 INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS  
 CABLE: (9) INSULATED CONDUCTORS TWISTED TOGETHER WITH FILLER TO FORM A CABLE CORE  
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS  
 NOM. DIA.  
 .030"  
 .050" ± .001"  
 .182"  
 OVERALL CABLE DIAMETER  
 .246" ± .010"  
 (BY PI TAPE)

2) PHYSICAL PROPERTIES:  
 TEMPERATURE RATING, MAX. 60°C & 80°C  
 TEMPERATURE RATING, MIN. -20°C  
 WT./M', NOM., NET. 39.8 LBS.

3) ELECTRICAL CHARACTERISTICS:  
 CAPACITANCE, MUTUAL, NOM. 20 PF/FT.  
 DIELECTRIC WITHSTANDING, MIN. 1500V RMS  
 VOLTAGE RATING, MAX. 300V  
 D.C. RESISTANCE, MAX. PER ASTM B286 16.7 Ω/1,000'


4) AGENCY APPROVALS:  
 NEC (UL) TYPE CM  
 UL AWM STYLE 2464  
 CSA AWM FT4  
 MEETS (UL) VW-1 FLAME TEST

5) APPLICATION:  
 RS232 COMPUTER INTERCONNECT, CONTROL AND SOUND CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:  
 QUABBIN 7150 (UL) TYPE CM 22 AWG OR AWM 2464 VW-1 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 --  
 RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:  
 1. BLACK  
 2. RED  
 3. WHITE  
 4. GREEN  
 5. ORANGE  
 6. BLUE  
 7. BROWN  
 8. YELLOW  
 9. VIOLET

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S  
 STANDARD PACKAGING

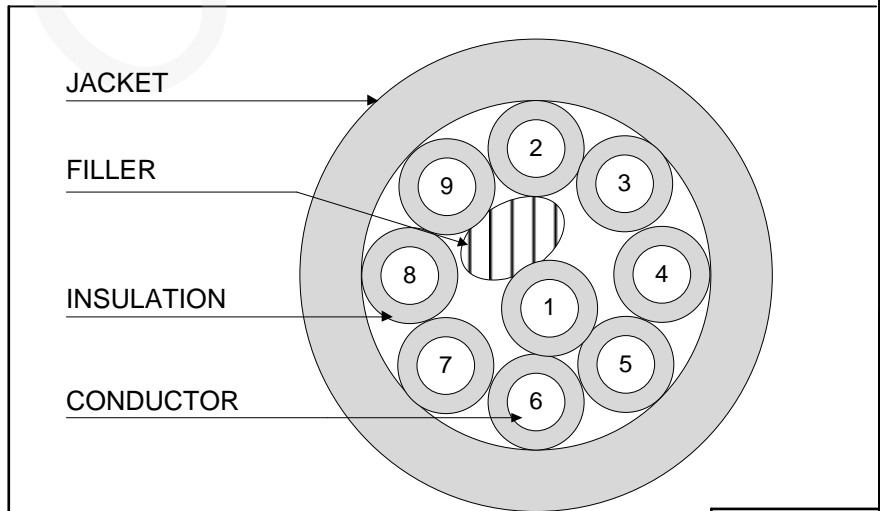

CUSTOMER APPROVAL:

DATE:

Created 08/08/96	DRAWN: 07/15/22 SGH	
REV. 06	CHECKED: 07/19/22 ZRS	
TITLE 9/C 22 AWG SR-PVC/PVC CABLE --TYPE CM, STYLE 2464, VW-1, CSA AWM FT4		
QUABBIN P/N	7150	1 of 1