

1) CONSTRUCTION:

CONDUCTOR:	22 AWG 7/30 STRANDED TINNED COPPER	NOM. DIA.	.030"
INSULATION:	SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS		.050" ± .001"
CABLE:	(12) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE		.202"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER	.266" ± .010" (BY PI TAPE)

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 80°C
TEMPERATURE RATING, MIN.	-20°C
WT./M', NOM., NET.	49.2 LBS.
JACKET IS UV RESISTANT	

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	20 PF/FT.
DIELECTRIC WITHSTANDING, MIN.	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX.	16.7 Ω/1000'

4) AGENCY APPROVALS:

NEC (UL) TYPE CM
 CSA AWM FT4
 UL AWM STYLE 2464
 MEETS (UL) VW-1 FLAME TEST

5) APPLICATION:

RS232 COMPUTER INTERCONNECT, CONTROL AND SOUND CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:


QUABBIN 7160 (UL) TYPE CM 22 AWG OR AWM 2464 VW-1 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 --
 RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:

1. BLACK
2. RED
3. WHITE
4. GREEN
5. ORANGE
6. BLUE
7. BROWN
8. YELLOW
9. VIOLET
10. GRAY
11. PINK
12. TAN

8) PACKAGING:

TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

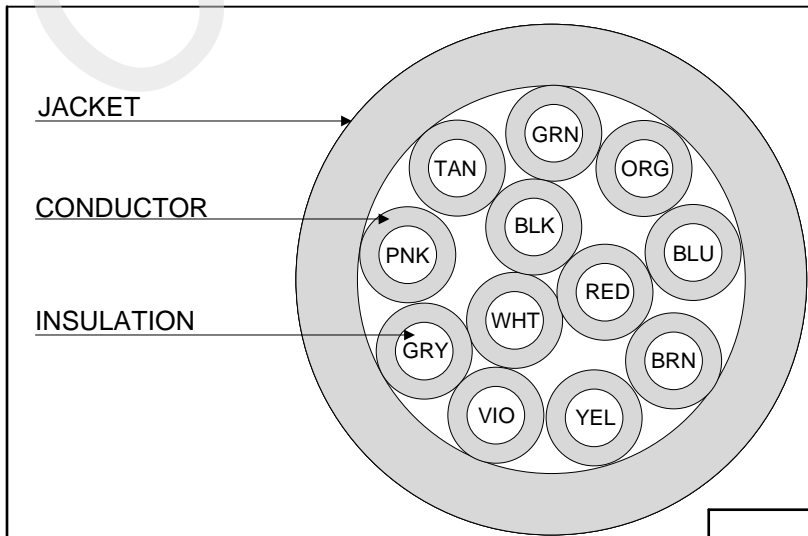

CUSTOMER APPROVAL:

DATE:

Created 12/04/95	DRAWN: 06/16/23 SGH	
REV. 05	CHECKED: 06/30/23 ZRS	
TITLE 12/C 22 AWG SR-PVC/PVC CABLE --TYPE CM, STYLE 2464, VW-1, CSA AWM FT4		
QUABBIN P/N	7160	1 of 1