

1) CONSTRUCTION:  
 CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER  
 INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS  
 CABLE: (15) COLOR CODED SINGLES TWISTED TOGETHER TO FORM A CABLE CORE  
 CORE  
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS  
 OVERALL CABLE DIAMETER

NOM. DIA.  
 .030"  
 .050"  
 .235"  
 .299"

2) PHYSICAL PROPERTIES:  
 TEMPERATURE RATING, MAX. 60°C & 80°C  
 WT./M', NOM., NET. 59.8 LBS.

3) ELECTRICAL CHARACTERISTICS:  
 CAPACITANCE, MUTUAL, NOM. 28 PF/FT.  
 DIELECTRIC WITHSTANDING, MIN 1500V RMS  
 VOLTAGE RATING, MAX. 300V  
 D.C. RESISTANCE, MAX. 16.7 Ω/1000'


4) AGENCY APPROVALS:  
 UL STYLE 2464  
 (UL) NEC TYPE CM  
 CSA AWM FT4

5) APPLICATION:  
 RS232 COMPUTER INTERCONNECT, CONTROL AND SOUND CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:  
 QUABBIN P/N 7166R (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 --  
 RoHS -- **(LOT DESIGNATOR)**

- 7) COLOR CODE:  
 1. BLACK  
 2. WHITE  
 3. RED  
 4. GREEN  
 5. ORANGE  
 6. BLUE  
 7. WHITE/BLACK  
 8. RED/BLACK  
 9. GREEN/BLACK  
 10. ORANGE/BLACK  
 11. BLUE/BLACK  
 12. BLACK/WHITE  
 13. RED/WHITE  
 14. GREEN/WHITE  
 15. BLUE/WHITE

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S  
 STANDARD PACKAGING

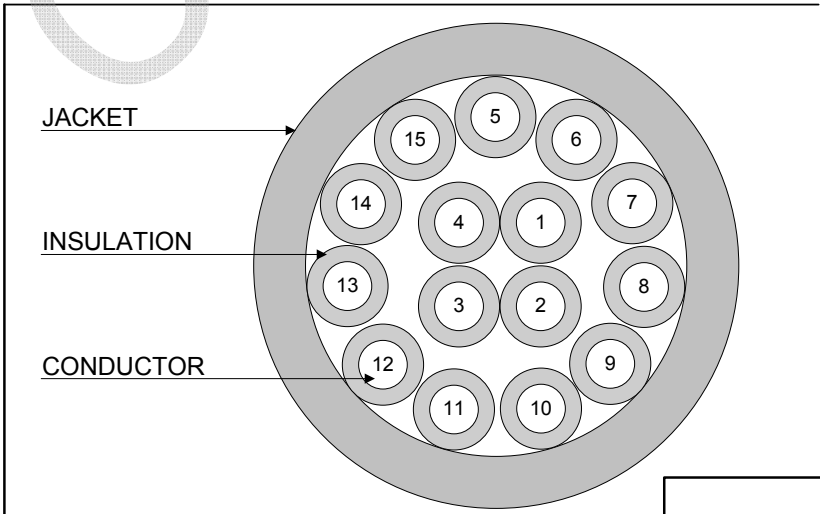

Created 3/19/96	DRAWN: BMD 12/16/11	
REV. 02	CHECKED: GBM 12/20/11	
TITLE 15/C 22 AWG PVC/PVC CABLE -- TYPE CM, STYLE 2464, CSA AWM FT4		
QUABBIN P/N	7166	1 of 1

CUSTOMER APPROVAL:

DATE: