

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR:	22 AWG SOLID TINNED COPPER	.0254"
INSULATION:	SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS	.045"
CABLE:	(2) COLOR CODED SINGLES TWISTED TOGETHER TO FORM A CABLE CORE	.090"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM WALL THICKNESS	.154"
	OVERALL CABLE DIAMETER	

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 80°C
TEMPERATURE RATING, MIN.	-20°C
WT./M', NOM., NET.	12.5 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	25 PF/FT.
DIELECTRIC WITHSTANDING, MIN.	2000V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	17.2 Ω/1000'


4) AGENCY APPROVALS:
 NEC (UL) TYPE CM
 UL AWM STYLE 2464
 CSA AWM FT4

5) APPLICATION:
 CONTROL AND SOUND INTERCONNECT CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 7200 (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

7) COLOR CODE:
 1. BLACK X 2. RED

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

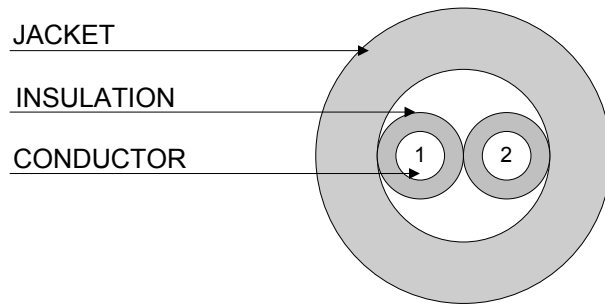

Created 09/24/96	DRAWN: 11/21/13 BMD	
REV. 02	CHECKED: 11/22/13 GBM	
TITLE 2/C 22 AWG PVC/PVC -- TYPE CM, AWM 2464, CSA AWM FT4		
QUABBIN P/N	7200	1 of 1

CUSTOMER APPROVAL:

DATE: