

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR: 22 AWG SOLID TINNED COPPER,		.0254"
INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS		.045"
PAIRS: COLOR CODED SINGLES TWISTED INTO PAIRS		.090"
CABLE: (5) TWISTED PAIRS CABLED TOGETHER TO FORM A CABLE CORE.		.201"
JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .035" NOM. WALL THICKNESS		
	OVERALL CABLE DIAMETER	.271"

2) PHYSICAL PROPERTIES:	
TEMPERATURE RATING, MAX.	60°C & 80°C
TEMPERATURE RATING, MIN.	-20°C
WT./M', NOM., NET.	41.2 LBS.

3) ELECTRICAL CHARACTERISTICS:	
CAPACITANCE, MUTUAL, NOM.	24 PF/FT
DIELECTRIC WITHSTANDING, MIN	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	17.2 Ω/1000'


4) AGENCY APPROVALS:  
 NEC (UL) TYPE CM  
 UL AWM STYLE 2464  
 CSA AWM FT4

5) APPLICATION:  
 RoHS COMPLIANT MATERIALS

6) PRINT:  
 QUABBIN 7220 (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --  
**(LOT DESIGNATOR)**

- 7) COLOR CODE:
1. BLACK X RED
  2. BLACK X WHITE
  3. BLACK X GREEN
  4. BLACK X BLUE
  5. BLACK X YELLOW

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S  
 STANDARD PACKAGING

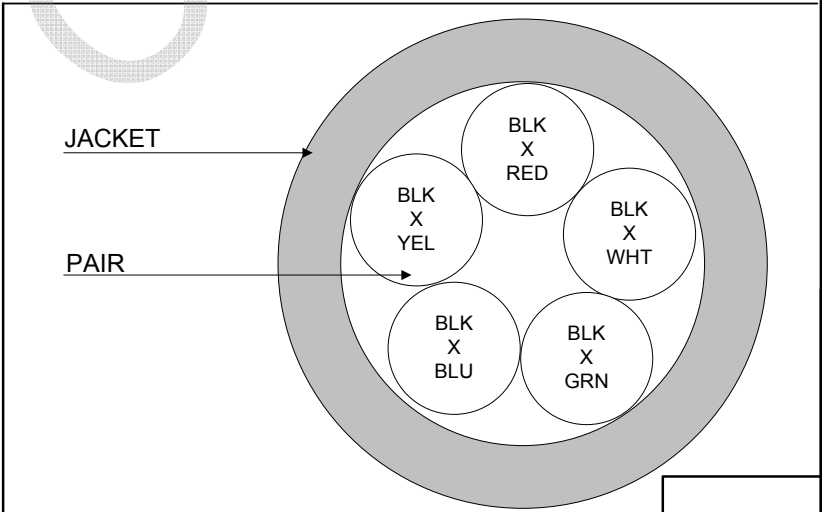

Created 5/8/12	DRAWN: BMD 5/8/12	
REV. 01	CHECKED: GBM 05/09/12	
TITLE 10/C (5 PR.) 22 AWG PVC/PVC CABLE -- TYPE CM, STYLE 2464, AWM FT4		
QUABBIN P/N	7220	1 of 1

CUSTOMER APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_