

1) CONSTRUCTION: NOM. DIA.
 CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER .030"
 INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS .050"
 PAIRS: COLOR CODED SINGLES TWISTED INTO PAIRS .100"
 CABLE: (3) TWISTED PAIRS TWISTED TOGETHER TO FORM A CABLE CORE .156"
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS .220"
OVERALL CABLE DIAMETER

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C & 80°C
 WT./M', NOM., NET. 30.1 LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL, NOM. 20 PF/FT.
 DIELECTRIC WITHSTANDING, MIN 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. PER ASTM B286 16.7 Ω/1,000'


4) AGENCY APPROVALS:
 (UL) AWM STYLE 2464
 NEC (UL) TYPE CM
 CSA AWM FT4


5) APPLICATION:
 CONTROL AND SOUND INTERCONNECT CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 7265R (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

7) COLOR CODE:
 1. BLACK X RED
 2. BLACK X WHITE
 3. BLACK X GREEN

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

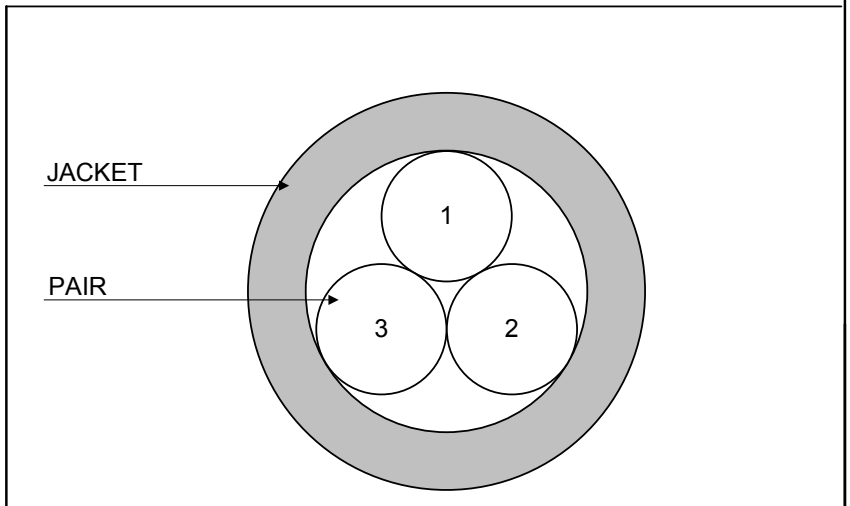

REVISION 01	DATE:	DRAWN <i>B. Duceyuski</i> 9/16/09	
REVISED BY		CHECKED <i>G. Munro</i> 09/16/09	
CHECKED		CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 3 PR. 22 AWG PVC/PVC CABLE -- TYPE CM, STYLE 2464, CSA AWM FT4
			QUABBIN P/N 7265 1 OF 1