

1) CONSTRUCTION:

CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER	NOM. DIA.
INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS	.030"
PAIRS: COLOR CODED SINGLES TWISTED INTO PAIRS	.050"
CABLE: (4) TWISTED PAIRS TWISTED TOGETHER TO FORM A CABLE CORE	.100
JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS	.193"
OVERALL CABLE DIAMETER	.257"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 80°C
WT./M', NOM., NET.	39.9 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	15 PF/FT.
DIELECTRIC WITHSTANDING, MIN	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	16.7 OHMS/M'

4) AGENCY APPROVALS:

- UL STYLE 2464
- NEC (UL) TYPE CM
- CSA AWM FT4


5) APPLICATION:  
CONTROL AND SOUND INTERCONNECT CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:  
QUABBIN 7270R (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --  
**(LOT DESIGNATOR)**

7) COLOR CODE:

1. BLACK X RED
2. BLACK X WHITE
3. BLACK X GREEN
4. BLACK X BLUE

8) PACKAGING:  
TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

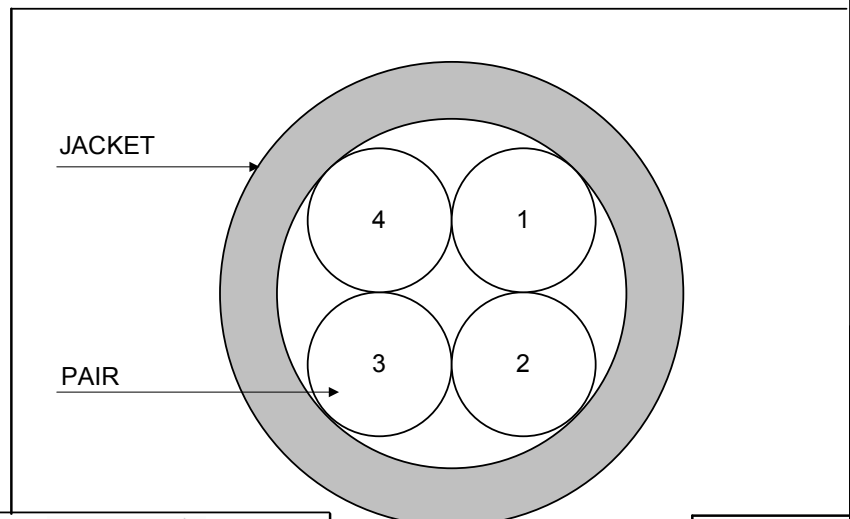

REVISION 01	DATE:	DRAWN <i>B. Duceyuski</i> 8/9/06	
REVISED BY		CHECKED <i>J. Kromer</i> 8/9/06	
CHECKED		CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 4 PR. 22 AWG PVC/PVC CABLE -- TYPE CM, STYLE 2464, CSA AWM FT4
			QUABBIN P/N <b>7270</b> 1 OF 1