

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR:	22 AWG SOLID TINNED COPPER	.025"
INSULATION:	SEMI-RIGID POLYVINYLCHLORIDE .013" NOM. WALL THICKNESS	.051"
PAIRS:	COLOR CODED SINGLES TWISTED INTO PAIRS	.102"
SHIELD:	EACH PAIR SHALL BE COVERED WITH AN ALUMINIZED POLYESTER FOIL SHIELD (FOIL IN, 100% COVERAGE) AND CONTAIN A 22 AWG SOLID TINNED COPPER DRAIN WIRE IN CONTACT WITH THE METALIZED SURFACE. SHIELDS SHALL BE ISOLATED BY AN EDGE FREE TAPE.	.105"
CABLE:	(3) SHIELDED TWISTED PAIRS CABLED TOGETHER, WRAPPED WITH A CLEAR POLYESTER BINDER TO FORM A CABLE CORE.	.206"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS	
	OVERALL CABLE DIAMETER	.270"

2) PHYSICAL PROPERTIES:	
TEMPERATURE RATING, MAX.	60°C & 80°C
TEMPERATURE RATING, MIN.	-20°C
WT./M', NOM., NET.	39.3 LBS.

3) ELECTRICAL CHARACTERISTICS:	
CAPACITANCE, MUTUAL, NOM.	26 PF/FT.
CAPACITANCE, GROUNDED, NOM.	47 PF/FT.
DIELECTRIC WITHSTANDING, MIN.	2000V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX.	17.2 Ω/1,000'


- 4) AGENCY APPROVALS:  
 UL AWM STYLE 2464  
 (UL) NEC TYPE CM  
 CSA AWM FT4

5) APPLICATION:  
 INSTRUMENTATION, AUDIO, BROADCAST, AND COMPUTER INTERCONNECT CABLE

6) PRINT:  
 QUABBIN 7380 (UL) TYPE CM 22 AWG SHIELDED OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS -- **(LOT DESIGNATOR)**

- 7) COLOR CODE:  
 1. BLACK X RED  
 2. BLACK X WHITE  
 3. BLACK X GREEN

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

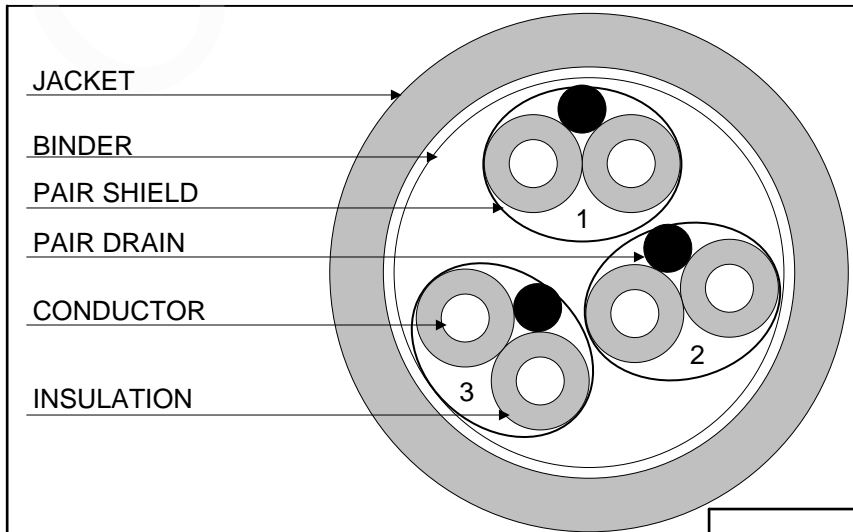

Created 05/28/98	DRAWN: BMD 05/12/21	
REV. 02	CHECKED: ZRS 05/12/21	
TITLE 6/C (3 PR.) 22 AWG SR-PVC/PVC CABLE -- TYPE CM, STYLE 2464, CSA AWM FT4		
QUABBIN P/N	7380	1 of 1

CUSTOMER APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_