

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR:	22 AWG 7/30 STRANDED TINNED COPPER	.030"
INSULATION:	LEAD FREE SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS	.050"
CABLE:	(2) COLOR CODED SINGLES TWISTED TOGETHER TO FORM A CABLE CORE.	.100"
SHIELD:	ALUMINIZED POLYESTER FOIL SHIELD (FOIL OUT, 100% COVERAGE) WITH A 22 AWG 7/30 STRANDED TINNED COPPER DRAIN WIRE CONTACTING THE METALIZED SURFACE FOR EASY TERMINATION	.103"
JACKET:	LEAD FREE POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER .164"

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C & 80°C
 WT./M', NOM., NET. 17.21 LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL, NOM. 37 PF/FT.
 CAPACITANCE, GROUNDED, NOM. 67 PF/FT.
 DIELECTRIC WITHSTANDING, MIN. 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. PER ASTM B286 16.7 OHMS/M'


4) AGENCY APPROVALS:
 CSA AWM FT4
 UL AWM STYLE 2464 80C 300V
 NEC TYPE CM


5) APPLICATION:
 RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 7515R (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

7) COLOR CODE:
 1. BLACK
 2. RED

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING.

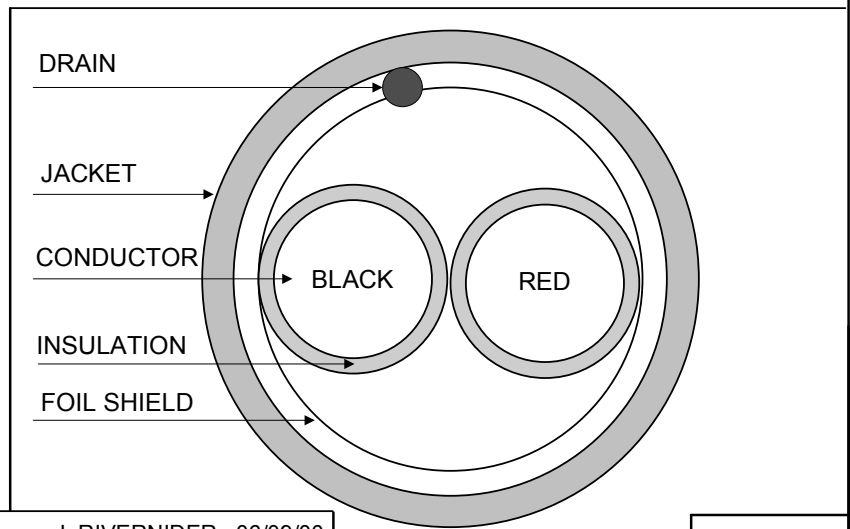

REVISION 03	DATE:	DRAWN J. RIVERNIDER 06/09/00	
REVISED BY B. M. DUCZYNSKI 3/9/05	CHECKED J. RIVERNIDER 06/09/00		
CHECKED J. RIVERNIDER 3/9/05	CHECKED		
CHECKED	CUSTOMER APPROVAL:	DATE:	TITLE 2/C 22 AWG PVC/PVC SHIELDED CABLE -- AWM 2464, TYPE CM, CSA AWM FT4
			QUABBIN P/N 7515 1 OF 1