

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR:	18 AWG 7/.0152 STRANDED BARE COPPER	.046"
INSULATION:	POLYVINYLCHLORIDE, .016" NOM. WALL THICKNESS	.078"
CABLE:	(2) INSULATED COLOR CODED SINGLES TWISTED TOGETHER TO FORM A CABLE CORE.	.156"
SHIELD:	AN ALUMINIZED POLYESTER FOIL SHIELD (FOIL OUT, 100% COVERAGE) SHALL BE APPLIED OVER THE CABLE CORE AND INCLUDE A 20 AWG 7/28 STRANDED TINNED COPPER DRAIN WIRE IN CONTACT WITH THE METALIZED SURFACE FOR EASY TERMINATION.	.159"
JACKET:	POLYVINYLCHLORIDE, BLACK, .037" NOM. WALL THICKNESS	.233"
	OVERALL CABLE DIAMETER	(BY PI TAPE)

2) PHYSICAL PROPERTIES:	
TEMPERATURE RATING, MAX.	80°C & 105°C
TEMPERATURE RATING, MIN.	-40°C
WT./M', NOM., NET.	31.7 LBS.
JACKET IS SUNLIGHT RESISTANT	

3) ELECTRICAL CHARACTERISTICS:	
CAPACITANCE, MUTUAL, NOM.	33 PF/FT.
CAPACITANCE, GROUNDED, NOM.	62 PF/FT.
DIELECTRIC WITHSTANDING, MIN.	2000V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX.	6.64 Ω/1,000'


- 4) AGENCY APPROVALS:
- NEC (UL) TYPE PLTC
  - NEC (UL) TYPE ITC
  - NEC (UL) TYPE CM
  - CEC C(UL) TYPE CM
  - UL AWM STYLE 2464

5) APPLICATION:  
 PROCESS SYSTEM INTERCONNECT. POWER LIMITED TRAY CABLE, INSTRUMENTATION TRAY CABLE. CLASS 3 CIRCUITS. RoHS COMPLIANT MATERIALS.

6) PRINT: (WHITE INK)  
 QUABBIN P/N 0328 (UL) TYPE PLTC OR ITC 18 AWG SHIELDED 105C SUN RES OR C(UL)US TYPE CM OR AWM 2464 -- RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:  
 PAIR: BLACK X WHITE

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

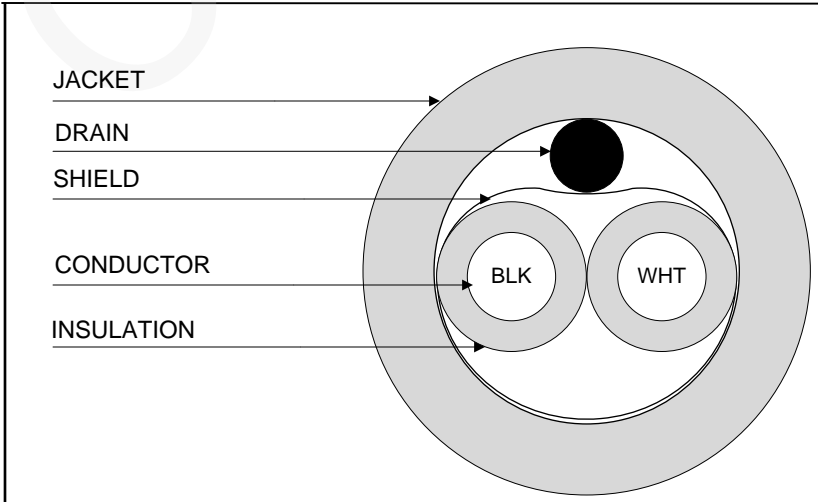

Created 08/21/20	DRAWN: 03/23/21 SGH	
REV. 02	CHECKED: 03/25/21 ZRS	
TITLE 1 PR (2/C) 18 AWG SHIELDED CABLE -- TYPE PLTC, TYPE ITC, C(UL)US TYPE CM, STYLE 2464		
QUABBIN P/N	0328	1 of 1

CUSTOMER APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_