

1) CONSTRUCTION:

CONDUCTOR:	26 AWG 7/34 STRANDED TINNED COPPER	NOM. DIA.	.019"
INSULATION:	HIGH DENSITY POLYETHYLENE, .011" NOM. WALL THICKNESS		.0405" ± .001"
PAIRS:	COLOR CODED SINGLES TWISTED INTO PAIRS		.081"
CABLE:	(4) TWISTED PAIRS TWISTED TOGETHER		.177"
SHIELD:	AN ALUMINUM POLYESTER ALUMINUM FOIL SHIELD (100% COVERAGE) WITH 7 ENDS OF 34 AWG TINNED COPPER DRAIN WIRE IN CONTACT WITH THE METALIZED SURFACE SHALL BE APPLIED OVER THE CABLE CORE.		.180"
JACKET:	LOW SMOKE ZERO HALOGEN, (COLOR, PER CHART 1), .023" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER	.235" NOM. .240" MAX. (BY PI TAPE)

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	75°C
TEMPERATURE RATING, MIN.	-20°C
WT./M', NOM., NET.	23.4 LBS.

CHART 1:

QUABBIN P/N	JACKET COLOR
2025	BLACK
2026	RED
2027	ORANGE
2028	YELLOW
2029	GREEN
2030	BLUE
2031	VIOLET
2032	GRAY
2033	WHITE

3) ELECTRICAL CHARACTERISTICS:

SEE PAGE 2

4) AGENCY APPROVALS:

NEC (UL) TYPE CM-ST1  
CEC C(UL) TYPE CM

5) APPLICATION:

SHIELDED FLEXIBLE PATCH/JUMPER CABLE TO SUPPORT SCREENED 568.2-D CATEGORY 6 APPLICATIONS. RoHS COMPLIANT MATERIALS. PATENT NO. US 9,355,759 B2.

6) PRINT: (WHITE INK ON BLACK JACKET, ALL OTHERS BLACK INK)

QUABBIN DATAMAX LSZH 6 F/UTP PATCH CORD P/N (QWC P/N PER CHART 1) -- PATENT NO. US 9,355,759 B2 -- CM C(UL)US CM-ST1 26 AWG 75C -- RoHS -- (LOT DESIGNATOR) (SEQUENTIAL FOOTAGE)

7) COLOR CODE:

1. WHITE/ORANGE X ORANGE
2. WHITE/BROWN X BROWN
3. WHITE/GREEN X GREEN
4. WHITE/BLUE X BLUE

8) PACKAGING:


TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

JACKET

PAIR

DRAIN

SHIELD

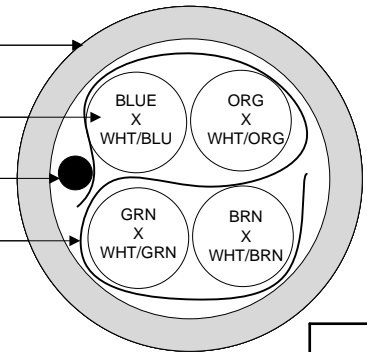

CUSTOMER APPROVAL:

DATE:

Created 09/10/18	DRAWN: BMD 05/10/23	
REV. 04	CHECKED: ZRS 05/10/23	
TITLE DATAMAX LSZH DUAL RATED 26 AWG CAT 6 F/UTP PATCH CABLE – TYPE CM-ST1		
DRAWING #		QWC0109
		1 of 2

3) ELECTRICAL CHARACTERISTICS:


CAPACITANCE, MUTUAL, NOM.	13.5 PF/FT. AT 1 MHz
DIELECTRIC WITHSTANDING, MIN.	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX.	14 Ω/100m (42.6 Ω/1,000')

**NOTE:** TESTING FOR THE FOLLOWING IS CONDUCTED OFF THE REEL. (FOR 100m OF CABLE)

IMPEDANCE, NOM.	100 ± 15 Ω	1 - 250 MHz
IMPEDANCE, SMOOTHED	100 ± 10 Ω TYPICAL	5 - 250 MHz
RETURN LOSS	1 ≤ f ≤ 10 MHz	20 + 5 LOG(f) dB MIN
	10 ≤ f < 20 MHz	25 dB MIN
	20 ≤ f ≤ 250 MHz	25 - 8.6 LOG(f/20) dB MIN
PS NEXT	1 ≤ f ≤ 250 MHz	42.3 - 15 LOG (f/100) dB MIN
NEXT	1 ≤ f ≤ 250 MHz	44.3 - 15 LOG (f/100) dB MIN
PS ACRF	1 ≤ f ≤ 250 MHz	24.8 - 20 LOG(f/100) dB MIN
ACRF	1 ≤ f ≤ 250 MHz	27.8 - 20 LOG(f/100) dB MIN
INSERTION LOSS	1 ≤ f ≤ 250 MHz	1.5[1.808 √(f) + 0.017(f) + 0.20/√(f)] dB MAX
DELAY	1 ≤ f ≤ 250 MHz	534 + 36/√(f) ns MAX
DELAY SKEW	1 ≤ f ≤ 250 MHz	<45 ns
TCL	1 ≤ f ≤ 250 MHz	30 - 10 LOG(f/100)
ELTCTL	1 ≤ f ≤ 30 MHz	35 - 20 LOG(f)
VELOCITY OF PROPAGATION	68%	

CUSTOMER APPROVAL:

DATE:

Created 09/10/18	DRAWN: BMD 05/10/23	
REV. 04	CHECKED: ZRS 05/10/23	
TITLE DATAMAX LSZH DUAL RATED 26 AWG CAT 6 F/UTP PATCH CABLE – TYPE CM-ST1		
DRAWING #		QWC0109
		2 of 2